



DN Series Crystal


- Micro Miniature SM Crystal
- Frequency Range 12.000MHz to 40.000MHz
- RoHS Compliant



ELECTRICAL CHARACTERISTICS	
Parameter	Value
Frequency Range	12.000MHz to 40.000MHz
Frequency Tolerance / Stability	(See Part Number Guide for Option)
Operating Temperature Range	(See Part Number Guide for Option)
Storage Temperature Range	-40°C to +85°C
Aging at +25°C	±3 ppm / year max
Shunt Capacitance	Less than 5pF
Load Capacitance	(See Part Number Guide for Option)
Equivalent Series Resistance (ESR)	(See ESR Chart)
Mode of Operation	(See ESR Chart)
Drive Level	1µW to 100µW

ENVIRONMENTAL & MECHANICAL SPEC	
Shock	MIL-STD-883, Method 2002 Cond B
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Vibration	MIL-STD-883, Method 2007, Cond A
Gross Leak Test	MIL-STD-883, Method 1014, Cond C
Fine Leak Test	MIL-STD-883, Method 1014, Cond A2
MSL	Level 1 per IPC/JEDEC J-STD 20
Reflow Conditions	260°C max 10 sec per IPC/JEDEC J-STD 20

EQUIVALENT SERIES RESISTANCE CHART		
Frequency Range	ESR	Mode / Cut
12.000MHz to 16.000MHz	60Ω max	Fund / AT
16.000MHz to 30.000MHz	50Ω max	Fund / AT
30.000MHz to 40.000MHz	40Ω max	Fund / AT

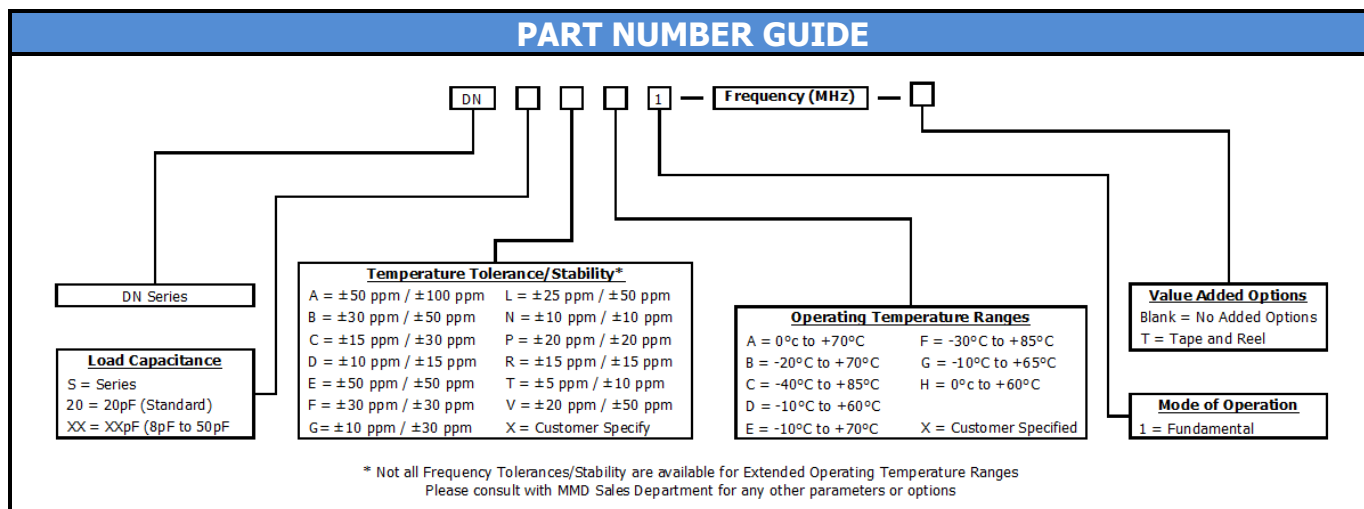


**QUALITY SYSTEM
CERTIFIED
= ISO 9001 =**

ILSI America LLC – MMD Inc.
 5458 Louie Lane, Reno, NV 89511
 Tel: (775) 851-8880, Fax: (775) 851-8882
www.mmdcomp.com e-mail@ilsiamerica.com



DN Series Crystal

Mechanical Details

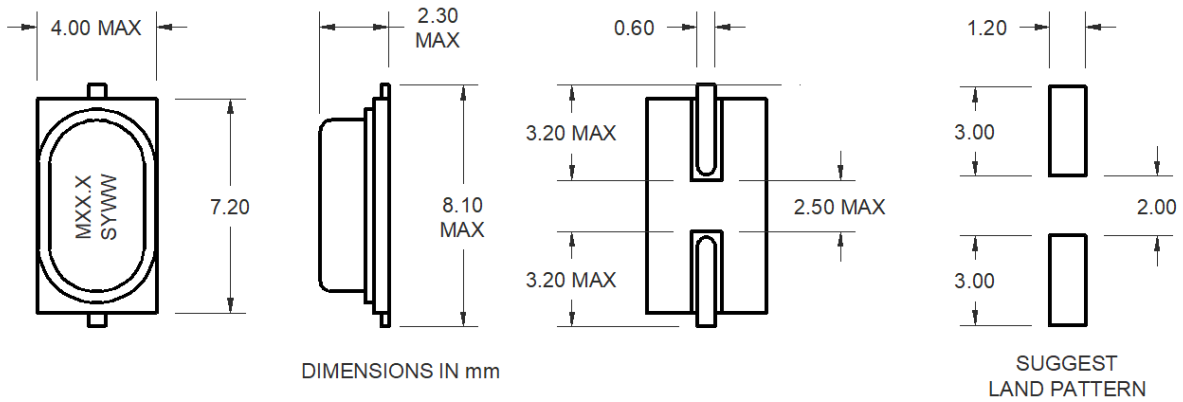

Package Information

1. Base or under conductor – Nickel thickness 1.3 to 1.8 Microns.
2. Final Plating (99.97%) 0.8 to 1.2 Microns.

Marking Detail

Line 1	=	MXX.X (Not to exceed 5 characters including decimal point))
M	=	MMD
XX.X	=	Output Frequency (4 digits including decimal point.)
Line 2	=	SYWW or SSYWW (Not to exceed 5 characters)
S or SS	=	Internal Code (can be 1 or 2 characters)
YWW	=	Date Code (Year/Week)
Y	=	First digit of year of Manufacture
WW	=	Week of Manufacture